

Application

RPS5 and 6

The RPS 5 and 6 models are zero U solutions that provide either two or four receptacles from dual power feeds. These units are typically mounted rack side or on the floor of the enclosure and power multiple PDUs.

RPS30


The RPS30 is a 19" rack mount solution that provides ten receptacles and two temperature sensor ports.

RPS20, 21, 22, and 23

These vertically mounted zero U power monitoring solutions provide up to 24 receptacles and environmental sensing on units equipped with sensor ports.

Network Operations Centers can now track and report power consumption and ambient temperature via SNMP.

All power monitoring functions can be executed over a single TELNET session. Dial-up connections are available with the DS Series for remote out-of-band power monitoring.

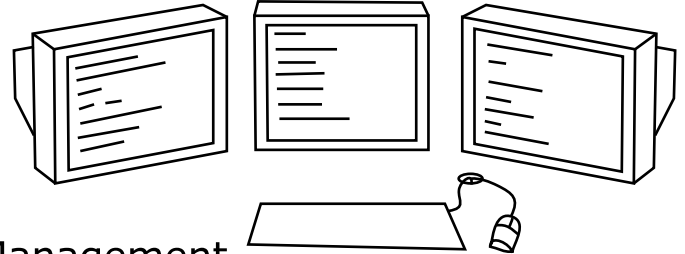

Product Specifications for RS232 Power Management

RPC Model	Control Interface	Power Input/Rating	Power Output	Overload Protection	Dimensions	Common Features
RPS5 & 6	RS232 Control Port: Eight pin modular(RJ-45) connector.	Dual power inputs 15, 20 or 30 Amps 120 or 230 VAC	2 or 4 receptacles 15, 20 or 30 Amps 120 or 230 VAC	Audible Overload Alarm SNMP notification of possible overload with DS Series SNMP controllers	Length: 8.25" Height: 2.6" Depth: 5"	Security: Password protection login procedure Logical Name: Outlet 1 for receptacle 1,...Outlet 8 for receptacle 8. Programmable up to 8 characters per receptacle Monitoring: Current, voltage, and temperature. LED Indicators: Power and alarm condition indicators Mounting: 19" rack-mount or zero U rack-side or cabinet mounting
RPS30		Single power input 20 Amps 120 VAC	10 receptacles 20 Amps 120 VAC		Length: 16.73" Height: 1.72" Depth: 4.5"	
RPS20		Single power input 15, 20, or 30 Amps 120 or 230 VAC	8 receptacles 15, 20, or 30 Amps 120 or 230 VAC		Length: 33.25" Height: 1.72" Depth: 2"	
RPS21		Single power input 15, 20, or 30 Amps 120 or 230 VAC	12 receptacles 15, 20, or 30 Amps 120 or 230 VAC		Length: 38.5" Height: 1.72" Depth: 2"	
RPS22		Single power input 15, 20, or 30 Amps 120 or 230 VAC	24 receptacles 15, 20, or 30 Amps 120 or 230 VAC		Length: 50.75" Height: 1.72" Depth: 2"	
RPS23		Single power input 15, 20, or 30 Amps 120 or 230 VAC	12 receptacles 15, 20, or 30 Amps 120 or 230 VAC		Length: 50.75" Height: 1.72" Depth: 2"	
RPS51		Single 3 phase input 20 Amps 120/208 VAC	26 receptacles 20 Amps 2 120 & 24 208 VAC		Length: 68" Height: 2.6" Depth: 2"	