


### **Reset Procedures RPC 36**

Before you begin

1. Carefully open the top panel of the unit.
2. Remove the gray data cable.
3. Power down the unit with the unit's power switch. This will not affect the power to the receptacles as long as the ATA cable is removed.
4. Locate JP1, short the 2 pins with a shunt jumper.
5. Power up the unit for 15 – 20 seconds.
6. Power down unit again.
7. Remove jumper from JP1
8. Power up the unit.
9. **IMPORTANT:** Terminal to the serial port of the RPC. Give the "on" command at the command prompt. This will turn ensure that the receptacles do not reboot when the cable is reattached.
10. Reattach the data cable.
11. Give the "on" command at the prompt again.
12. Unit is now correctly set at factory default.

**Figure 1**

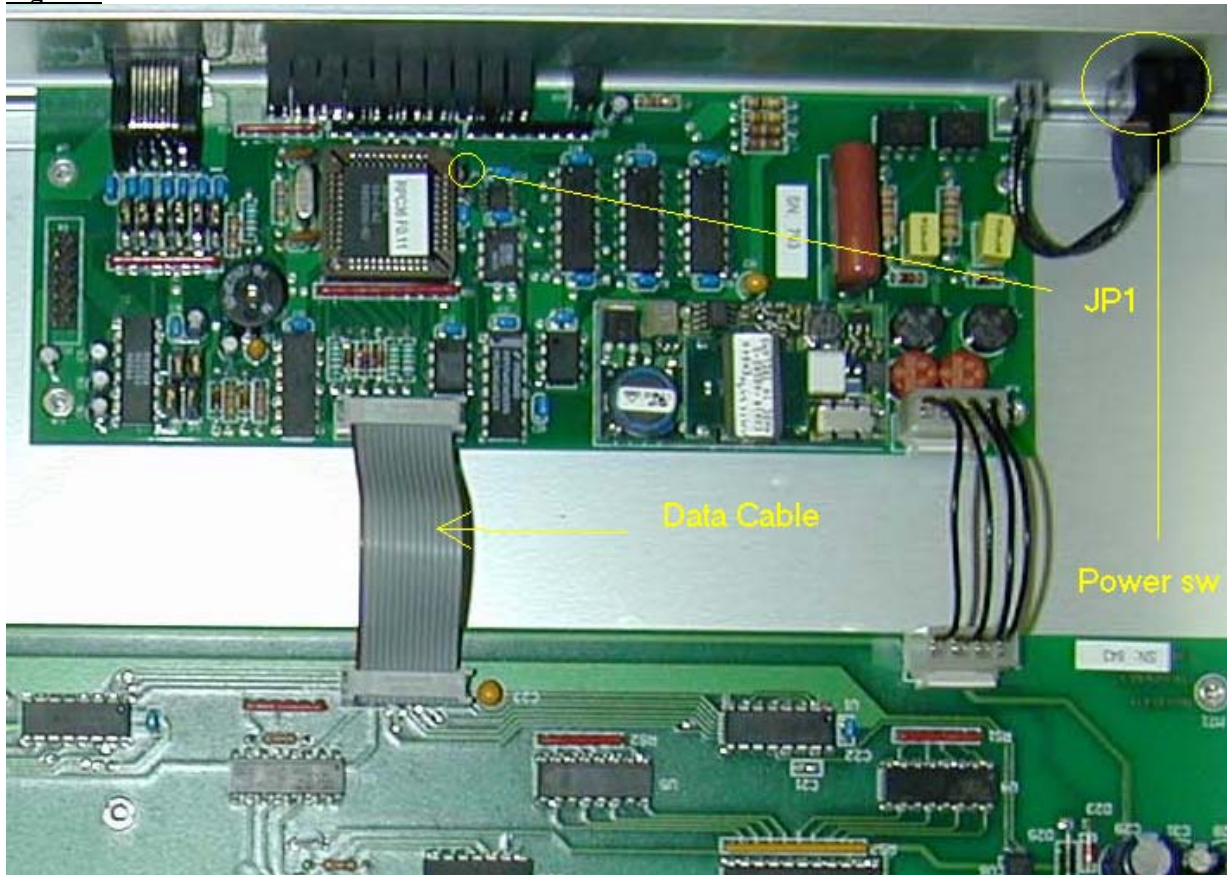

Any questions or concerns arising from this procedure should be directed to the BayTech support team at:

[support@baytech.net](mailto:support@baytech.net)

Bay Technical Associates

200 North Second St.

Bay St. Louis, MS 39520

Domestic: 800.523.2702

International: 228.467.8231