

Smart Power

Featuring Branch Circuit Metering

- Modular Design for flexible receptacle configurations
- Branch Circuit Metering
- Accuracy +/- 1% Full Load; kWh, kVa, PF, Amps and Voltage to the circuit level
- Aluminum Chassis for efficient heat transfer and grounding
- Available Zero U and Rackmount MMP chassis
- Easy to Read Color Display
- HTTPs, SNMPv3s, SSL and IPv6 Support
- Audible and Visual Alarms
- Two Sensor Ports for External Sensors
- Made in the USA




The Modular MSP Series provides Input and Branch Circuit Metering. The modularity of the MSP sets the standard for output receptacle flexibility.

Metering includes AMPs, Voltage, Active and Apparent Power and Power Factor. Power Factor is a great indicator of the health and condition of the power circuit.

The MSP Series does not have outlet control and is available with Direct IP or RS-232 access.



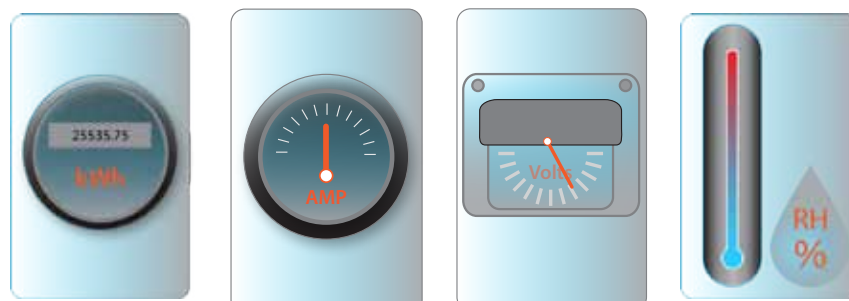

Vertical (ZeroU)

MODEL	Voltage	Input-Amps	kW	Plug Type	Recept Qty	Receptacles	Dual Pole Breakers	Size
MSP21.32.638AL-34	208V 3ØΔ	30A	8.6 kW	NEMA L21-30P	24	C13L(18); C19(6)	3-20A	55.50" x 2.90"/4.15" x 1.97"(50mm)
MSP11.32.647AL-34	208V 3ØΔ	30A	8.6 kW	NEMA L21-30P	30	C13L(24); C19(6)	3-20A	62.50" x 2.90"/4.15" x 1.97"(50mm)
MSP21.32.637L-34	208V 3ØΔ	30A	8.6 kW	NEMA L21-30P	30	C13L(30)	3-20A	55.50" x 2.90"/4.15" x 1.97"(50mm)
MSP11.32.645L-34	208V 3ØΔ	30A	8.6 kW	NEMA L21-30P	36	C13L(36)	3-20A	62.50" x 2.90"/4.15" x 1.97"(50mm)
MSP20.32.638AL-18	208V 3ØΔ	50A	14.4 kW	CS8365CP	24	C13L(18); C19(6)	6-20A	62.00" x 2.90"/4.15" x 1.97"(50mm)
MSP10.32.647AL-18	208V 3ØΔ	50A	14.4 kW	CS8365CP	30	C13L(24); C19(6)	6-20A	69.00" x 2.90"/4.15" x 1.97"(50mm)
MSP20.32.637L-18	208V 3ØΔ	50A	14.4 kW	CS8365CP	30	C13L(30)	6-20A	62.00" x 2.90"/4.15" x 1.97"(50mm)
MSP10.32.645L-18	208V 3ØΔ	50A	14.4 kW	CS8365CP	36	C13L(36)	6-20A	69.00" x 2.90"/4.15" x 1.97"(50mm)
MSP20.32.638AL-12	208V 3ØΔ	60A	17.3 kW	IEC60309P (60A)	24	C13L(18); C19(6)	6-20A	62.00" x 2.90"/4.15" x 1.97"(50mm)
MSP10.32.647AL-12	208V 3ØΔ	60A	17.3 kW	IEC60309P (60A)	30	C13L(24); C19(6)	6-20A	69.00" x 2.90"/4.15" x 1.97"(50mm)
MSP20.32.637L-12	208V 3ØΔ	60A	17.3 kW	IEC60309P (60A)	30	C13L(30)	6-20A	62.00" x 2.90"/4.15" x 1.97"(50mm)
MSP10.32.645L-12	208V 3ØΔ	60A	17.3 kW	IEC60309P (60A)	36	C13L(36)	6-20A	69.00" x 2.90"/4.15" x 1.97"(50mm)
MSP20.32.638AL-101	230/400V 3ØY	32A	22.1 kW	IEC60309P (32A)	24	C13L(18); C19(6)	6-16A	62.00" x 2.90"/4.15" x 1.97"(50mm)
MSP10.32.647AL-101	230/400V 3ØY	32A	22.1 kW	IEC60309P (32A)	30	C13L(24); C19(6)	6-16A	69.00" x 2.90"/4.15" x 1.97"(50mm)
MSP20.32.637L-101	230/400V 3ØY	32A	22.1 kW	IEC60309P (32A)	30	C13L(30)	6-16A	62.00" x 2.90"/4.15" x 1.97"(50mm)
MSP10.32.645L-101	230/400V 3ØY	32A	22.1 kW	IEC60309P (32A)	36	C13L(36)	6-16A	69.00" x 2.90"/4.15" x 1.97"(50mm)

Rackmount (Horizontal)

MODEL	Voltage	Input-Amps	kW	Plug Type	Recept Qty	Receptacles	Dual Pole Breakers	Size
MSP102.34.269L.172AL-34	208V 3ØΔ	30A	8.6 kW	NEMA L21-30P	11	C13L(10); C19(1)	3-20A	16.72" x 7.145" x 3.470"
MSP102.34.369L-34	208V 3ØΔ	30A	8.6 kW	NEMA L21-30P	12	C13L(12)	3-20A	16.72" x 7.145" x 3.470"
MSP102.34.368L-34	208V 3ØΔ	30A	8.6 kW	NEMA L21-30P	15	C13L(15)	3-20A	16.72" x 7.145" x 3.470"
MSP108.34A.671AL-18	208V 3ØΔ	50A	14.4 kW	CS8365CP	12	C13L(6); C19(6)	6-20A	16.72" x 7.145" x 3.470"
MSP108.34A.671-12	208V 3ØΔ	60A	17.3 kW	IEC60309P (60A)	12	C19(12)	6-20A	16.72" x 7.145" x 3.470"
MSP108.34A.671AL-101	230/400V 3ØY	32A	22.1 kW	IEC60309P (32A)	12	C13L(6); C19(6)	6-16A	16.72" x 7.145" x 3.470"

Above are the most popular configurations. For different input plug types, user interface or receptacle configurations please contact a BayTech representative.

Bay Technical Associates Inc 5239 A Ave Long Beach, MS 39560 Toll Free: 800-523-2702 Intl: 228-563-7334