


DS62_DS62-MD4 Reset

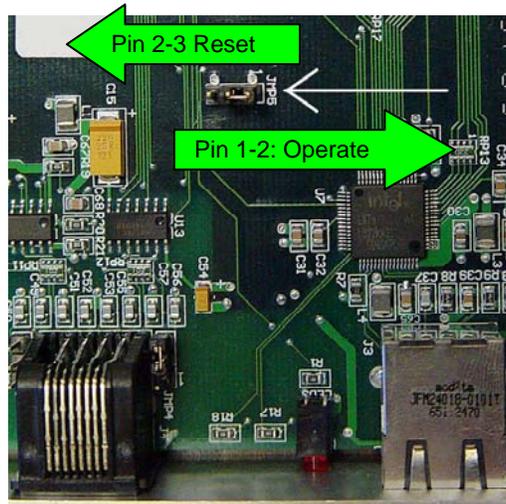

IMPORTANT: This procedure will reset configuration to factory default.

DS62 and DS62-MD4:

1. Remove the module from the chassis (Module is hot swappable).
2. Hold the module with the chip side up and the faceplate towards you.
3. Locate jumper JMP5 approximate center of circuit board.
4. Move the jumper from pins 1 and 2 to pins 2 and 3.
5. Put the module back in the chassis and wait 30 seconds.
6. Take the module back out and replace the jumper to the original position, pins 1 & 2.

The module is now reset to factory default.



Note: If the module appears not to have reset or opening menu has random characters in it, perform the reset procedure again except increase the reset time from 30 to 60 seconds.
DEFAULT username and password = root/baytech (lower case)